

# FR-D700

## Frequency Inverters

### The micro-drive solution

Small, cost-effective, reliable



Simple, time-saving startup



Flexible and versatile in application



Space-saving installation thanks to compact design



Higher energy savings with the OEC function

# The ultra compact standard inverter



Door and gate drives are only some of the multiple applications of the new FR-D700 series.

## Simple operation

### ■ Simple cabling

The integrated spring clamps to connect control and power lines quickly ensure reliable and simple cabling.

### ■ Easy parameterization

With the help of the parameterization software FR-Configurator a series of easy functions such as graphical machine analysis to optimize the drive system are available.

### ■ Integrated control unit

The integrated Digital Dial gives the user direct access to all important parameters much more quickly than would be possible with normal keys.

In addition to entering and displaying various parameters, the integrated four-digit LED display also monitors and displays current operating values and alarm messages.



Conveyor belts and chain conveyors are an ideal application for the FR-D700.

## Entry into the drive universe

Simple and safe operability, compact design as well as improved performance features were the focus during the development of the new FR-D700 frequency inverter. A drive was created that set new standards in the field of compact drives.

Improved functions and device properties such as simplified cabling thanks to spring clamps, the integrated Digital Dial with LED display, improved performance yield in the low-speed range as well as the integrated emergency stop function make the FR-D700 the new standard in the ultra compact class.

The FR-D700 is especially advantageous for standard applications by virtue of its user-friendliness. It is the correct choice in both simple and more sophisticated applications. Typical applications are feeder and conveyor drives, machining tools or gate and door drives.



The built-in multi-user panel with Digital Dial

## Flexible concept

### ■ Compact installation

Due to the ultra-compact dimensions the FR-D700 can be mounted directly side by side. A line within the FR-D700 series allows effective, space-saving heat dissipation through an approx. 1 cm thick cooling plate ("flat plate", up to 3.7 kW).

### ■ Simple network connection

The standard configuration of the FR-D700 has a serial interface (RS485) which allows communication with a PC and a PLC. Modbus RTU also is supported.

Compliance to international standards such as CE, UL, cUL, GOST, RoHS guarantees worldwide use.

### ■ Short service times

The fans are designed as compact units that can be replaced in less than 10 seconds for cleaning or in the event of failure.



Cabling and fan replacement made easy

### ■ Failure safety with self-diagnostics

This inverter actively monitors its own functional safety. If, for example, the fan rpm decreases to 50 %, a pre-alarm is triggered. An internal measuring program monitors the ageing of the capacitors and an operating hours counter enables the operator to plan the best time for servicing. Protection and overload functions like the phase failure monitoring system for both the input and output circuits ensure trouble-free operation.

## Upgraded functional scope

To protect both staff and valuable machinery, the FR-D700 has innovative functions that enable it to respond with great sensitivity to a variety of external factors.

### ■ Controlled deceleration during brief power failures

The frequency inverter can respond to power failures using regenerative energy to perform controlled deceleration of the motor. This prevents uncontrolled run-down and damage, for example, to textile machines.


### ■ Automatic restart after power failures

In pump and fan applications you can configure the inverter to resume power after brief power failures. The system then catches the coasting motor and automatically accelerates it back to the preset speed.

### ■ Integrated emergency stop function\*

The FR-D700 series has an emergency stop input for safe shutdown. This ensures safe operation in compliance with the European Machinery Directive without installation of a second protection mechanism. The FR-D700 thus conforms to the ISO 13849-1 (EN954-1) cat. 3 and IEC60204-1 cat. 0 standards.

\* available from summer 2008



Only one protection mechanism is needed.

## More standard functions

### ■ Sensorless vector control

The sensorless vector control of the FR-D700 also makes it possible to achieve exceptional speed and torque performance even without a motor with sensor. This saves additional hardware costs.

### ■ Independent motor setting

The independent motor setting is based on the Autotuning function that can read out all the parameters needed for the motor model in less than a minute even when it is not running.

### ■ High overload capacity of 200 %

The maximum short-term overload capacity of 200 % for 0.5 s minimizes downtimes caused by overload alarms.

### ■ Integrated brake chopper

The built-in brake transistor of the FR-D700 supports direct connection of an external braking resistor to improve stopping power.

## Additional energy savings

The FR-D700's OEC function helps to further optimize current and hence power consumption of the motor. The result is an additional decrease in energy requirement compared to a conventional inverter.


## Long service life

The FR-D700 is designed for a service life of over 10 years. This is made possible, among other things, by high-performance heat-resistant capacitors, cooling fans with sealed bearings and special lubricating grease. The flow of cooling air comes into contact only with the heat sinks and not electronic components. This ensures that no dust or dirt can collect on the components. The circuit boards are protected against aggressive environments with single or double layer conformal coating – another feature that ensures longer service life.

# Specifications ///

Overload capacity	ND (normal duty)
60 seconds overload	150 %
3 seconds overload	200 %
Ambient temperature	50 °C

Type	Rated current [A] *	Rated motor capacity [kW] *	W x H x D (mm)
200 V Type	FR-D720S-008-EC	0.8	68 x 128 x 80.5
	FR-D720S-014-EC	1.4	68 x 128 x 80.5
	FR-D720S-025-EC	2.5	68 x 128 x 142.5
	FR-D720S-042-EC	4.2	68 x 128 x 162.5
	FR-D720S-070-EC	7.0	108 x 128 x 155.5
	FR-D720S-0100-EC	10.0	140 x 150 x 155.5
400 V Type	FR-D740-012-EC	1.2	108 x 128 x 129.5
	FR-D740-022-EC	2.2	108 x 128 x 129.5
	FR-D740-036-EC	3.6	108 x 128 x 135.5
	FR-D740-050-EC	5.0	108 x 128 x 155.5
	FR-D740-080-EC	8.0	108 x 128 x 165.5
	FR-D740-120-EC	12	220 x 150 x 155
	FR-D740-160-EC	16	220 x 150 x 155

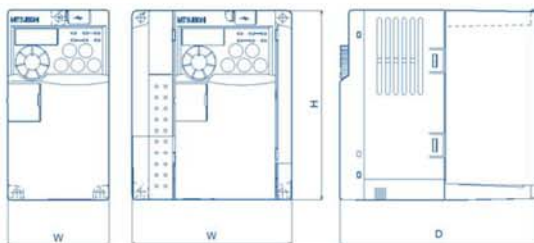

\* Standard operation / initial value

Operating conditions	Specifications
Voltage	1-phase, 200 – 240 V (–15 %, +10 %) or 3-phase, 380 – 480 V (–15 %, +10 %)
Ambient temperature	–10 °C to +50 °C (non freezing)
Storage temperature	–20 °C to +65 °C
Ambient humidity	Max. 90 % relative humidity (non condensing)
Altitude	Max. 1000 m above sea level

Operating conditions	Specifications
Protection	IP20
Shock resistance	10 G
Vibration resistance	Max. 0.6 G
Certifications	CE/UL/CUL/GOST/RoHS

## ACPD Limited

86 Rose Hill Road,  
Ashton-under-Lyne,  
Lancashire,  
England,  
OL6 8YF.

Tel: +44 (0)161 343 1884  
Fax: +44 (0)161 343 7773  
e-mail: sales@acpd.co.uk  
Websites: www.acpd.com &  
www.acpd.co.uk

