

This standard chart drive offers accuracy and reliability for precision measurements. The quartz movement concept provides robustness, and it was design to operate into a temperature range of -40° F up to $+180^{\circ}$ F. The universal mounting plate makes it easy to install into all commonly use recorders.

Main Features

• Concept

In precise combination of Fast-Slow drive and corresponding Fast-Slow charts, a greatly enhanced flow pattern will be registered in the test sector of 90°.

• Application

The full potential of the Fast-Slow idea is recognized at measurement points where the expected chart pattern is a wide, solid band or narrow, high spikes.

• Benefits

Advantages are identified such as improved chart reading accuracy, manpower savings and elimination of separate test charts.

Technical data

| | Standard Fast/Slow battery chart drives | | | |
|---------|---|---------------|-----------|--|
| Part N° | Mounting plate type | Output shaft | Approvals | |
| 820R001 | А | ¼"Dia. CCW | UL | |
| 820R007 | В | Threaded CCW | UL | |
| 820R011 | A | 1⁄4 "Dia. CCW | CUL | |

Characteristics

| Advantages | | | | | |
|-----------------------------|--|--|---|--|--|
| Rotating speeds | Test: Regular: Test Fast: Slow: Fast/Slow: | | 6 hr - 8 d 24 hr - 8 d 24 hr - 31 d | | |
| Rotation | Counter clock wise | | | | |
| Accuracy | Quartz controlled | | | | |
| Function indicator | Pulsating GREEN LED: all fast speeds Pulsating RED LED: all slow speeds and single speeds | | | | |
| Torque | 25 IN-OZ at all speeds | | | | |
| Operating temperature range | -40° F to 160° F | | | | |
| Corrosion protection | Sealed with gaskets | | | | |
| Power supply | 1.5 V Alkaline "C" Size battery | | | | |
| Battery life | SPEED 60 minutes 24 hours 7-31 days | AMB. TEMP. 2 weeks 6 months 24 months | 32° F 1 week 4 months 16 months | -5° F 1 week 3 months 12 months | |
| Mounting | No additional standoffs required | | | | |
| Approvals | UL Listed: class 1 Groups C & D CUL Listed: class 1 Groups C & D Intrinsically safe chart drive | | | | |
| Patent | US patent 4.492.905 | | | | |
| Availability | SONCEBOZ CORPORATION - Ann Arbor, MI Distributors / Service Companies Throughout the US and Canada | | | | |

Special requirements upon customer specifications. Right to change reserved.

ACP&D Limited 86 Rose Hill Road, Ashton-under-Lyne, Lancashire, England, OL6 8YF.








< 1.0 >


Dimensions

Drawing not to scale. All dimensions in inches.

• A - Universal mounting plate

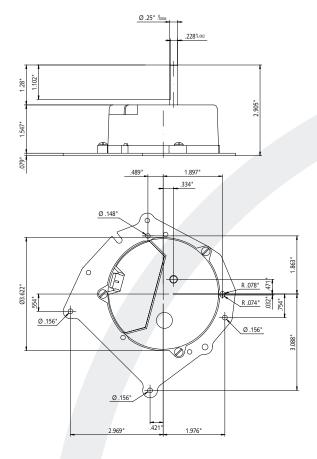

• B - Foxboro-style Plate



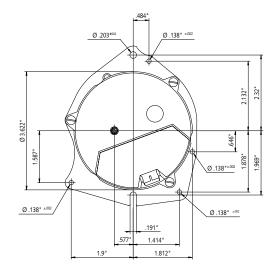


Chart hubs are available

- "Contact face" clamps without twisting or distorting chart paper. Four starter threads results in fast tight clamping
 - Part N° C1081 G004 Foxboro-style Push-pull chart hub
 - Part N° 725 A032 Chart hub
 - Part N° 725 P696 Chart nut



Special requirements upon customer specifications. Right to change reserved.

ACP&D Limited 86 Rose Hill Road, Ashton-under-Lyne, Lancashire, England, OL6 8YF.








< 1.0 >

Chart paper available

• Sonceboz Fast/Slow Chart Paper Exclusively designed for type 830 chart drive

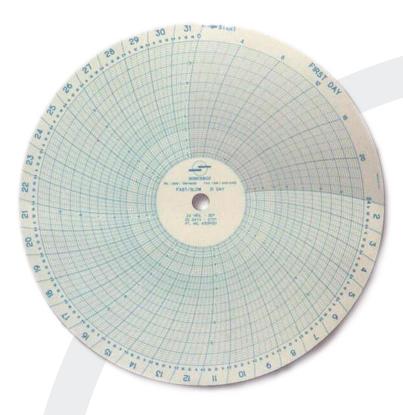

| Chart paper available | | | | | |
|-------------------------|---|----------------------------|--|--|--|
| Part N° Linear 0-100 | Description Rotation | Part N° Square Root L10 | | | |
| 830P010 | 7 days 6 hr - 90° 6 days/18 hr – - 270° | | | | |
| 830P011 | 8 days 6 hr - 90° 7 days/18 hr - 270° | 830P017 | | | |
| 830P012 | 7 days 24 hr - 90° 6 days – 270° | 830P018 | | | |
| 830P013 | 8 days 6 hr - 90° 6 days/18 hr - 270° | 830P019 | | | |
| 830P014 | 7 days 6 hr - 90° 6 days/18 hr - 270° | | | | |
| 830P015 | 31 days 24 hr - 90° 30 days270° | | | | |

Special requirements upon customer specifications. Right to change reserved.

ACP&D Limited 86 Rose Hill Road, Ashton-under-Lyne, Lancashire, England, OL6 8YF.

Tel: +44 (0)161 343 1884 Fax: +44 (0)161 343 7773 e-mail; sales@acpd.co.uk Websites: www.acpd.com & www.acpd.co.uk





< 1.0 >