


6154



Angle de pas
Schrittwinkel
Step angle 15 °


Diamètre
Durchmesser
Diameter 25.4 mm

Poids
Gewicht
Weight 36 g

Couple de retenue
Haltemoment
Holding torque 6.8/5.3 mNm






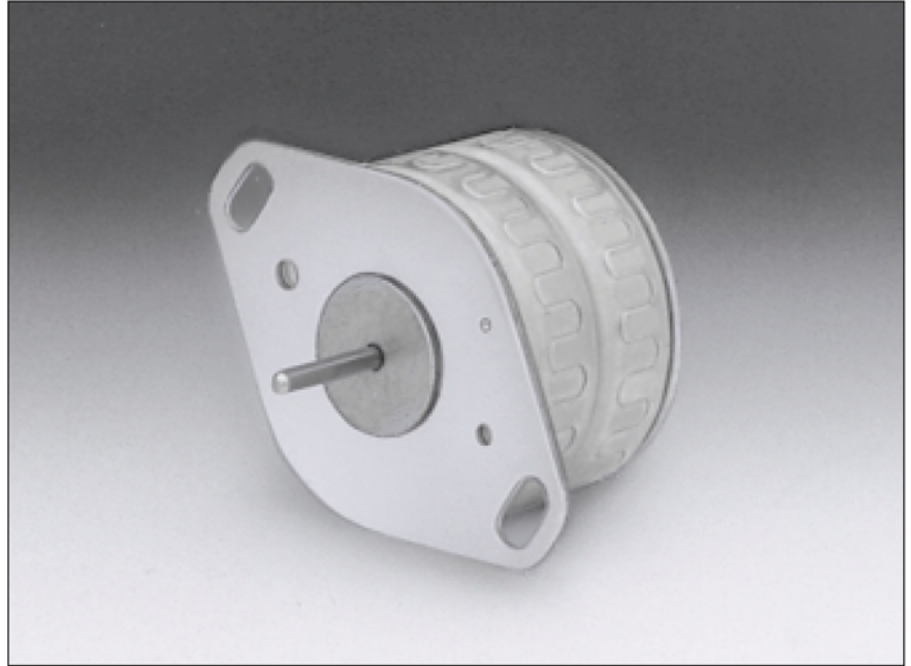


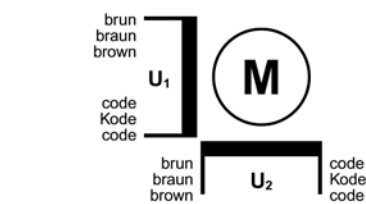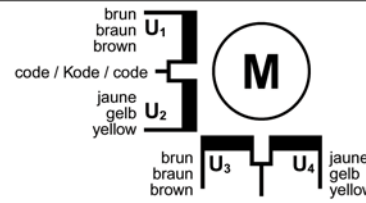		Résistance de phase Phasenwiderstand Phase resistance Ω	Induct. de phase Phaseninduktivität Phase inductance mH	Courant de phase Phasenstrom Phase current A	Couple de retenue Haltemoment Holding torque mNm	Puissance nominale Nennleistung Nominal power W	Code câble Kabelcode Cable-code	
bipolar	6154-2-9	9	6	0.288	6.8	1.5	rose rosa pink	
	6154-2-36	36	24	0.144	6.8	1.5	rouge rot red	
	6154-2-150	150	106	0.070	6.8	1.5	bleu blau blue	
unipolar	6154-4-9	9	3	0.288	5.3	1.5	rose rosa pink	
	6154-4-36	36	12	0.144	5.3	1.5	rouge rot red	
	6154-4-150	150	49	0.070	5.3	1.5	bleu blau blue	


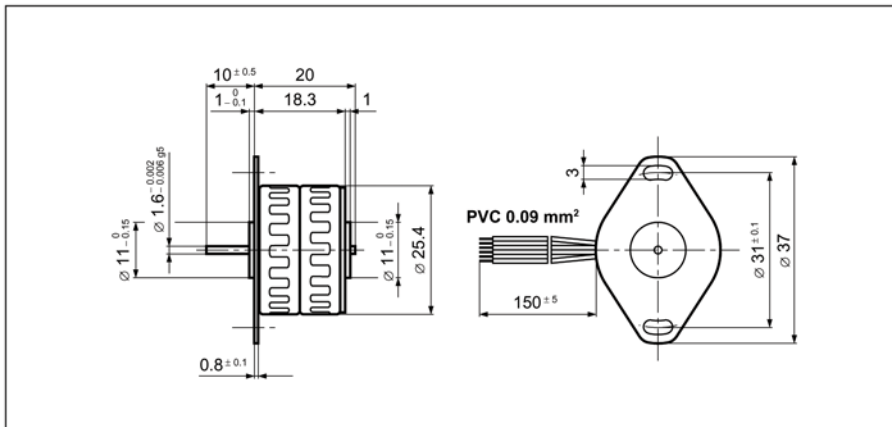


Pas/ Schritte/U Steps/rev	24
Précision/pas Schrittgenauigkeit Step accuracy	± 10 %
Inertie du rotor Rotorträgheitsmoment Rotor inertia	1.1 gcm²
Classe d'isolation Isolationsklasse Insulation class	E 120 °C
Protection Schutzart Protection	DIN 40050 IP 30
Tension d'essai Prüfspannung Test voltage	500 VAC
Couple résiduel Restmoment Detent torque	0.6 mNm

Caractéristiques dynamiques
Dynamische Daten
Dynamic characteristics

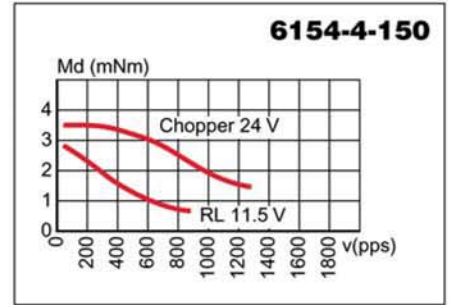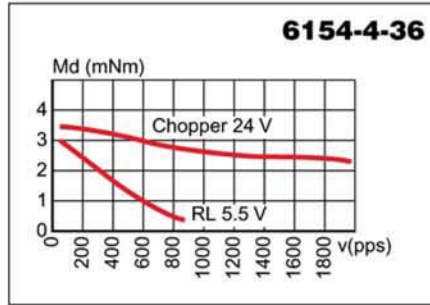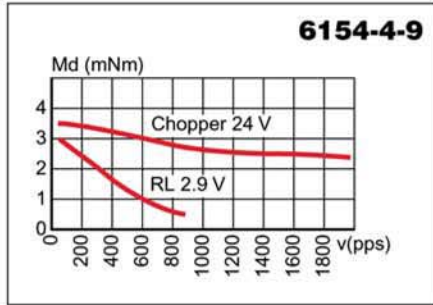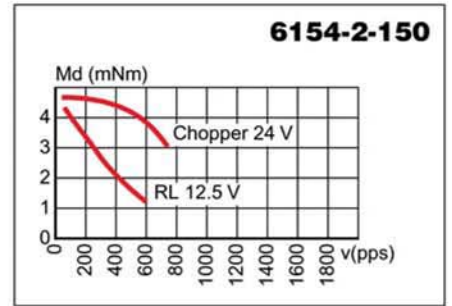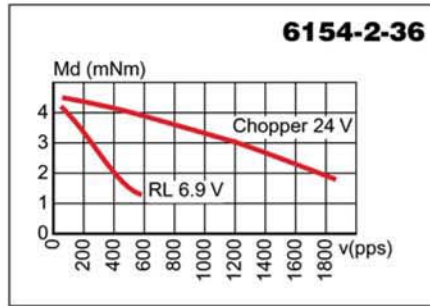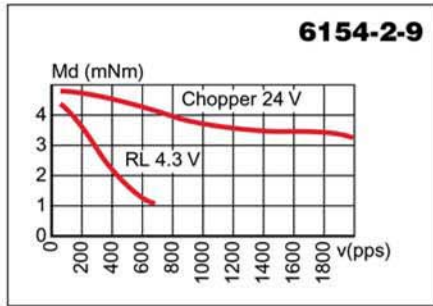

Caractéristiques statiques
Statische Daten
Static characteristics

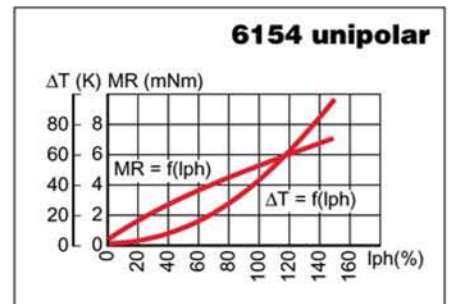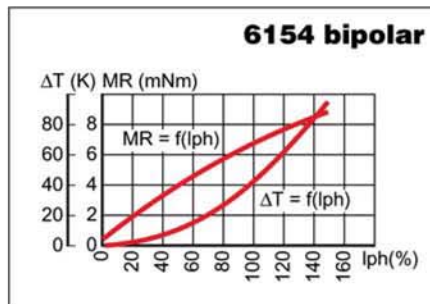

Possibilités d'exécutions adaptées sur demande.
 Auf Wunsch werden kundenspezifische Anforderungen berücksichtigt.
 Special requirements can be made to customer specification.

ACP&D Limited

86 Rose Hill Road,
 Ashton-under-Lyne,
 Lancashire,
 England,
 OL6 8YF.

Tel: +44 (0)161 343 1884
 Fax: +44 (0)161 343 7773
 e-mail: sales@acpd.co.uk
 Websites: www.acpd.com &
 www.acpd.co.uk

